

CTA

CTA Timer/Counter/Tachometer




Features

- 3-in-1 timer/counter/tachometer
- Mixed timer + counter function
- 6-digit LCD display
- Maximum speed of the counter: 10Kcps
- NPN or PNP input signals available
- Pre-scale function
- Counting types: 1-stage, 2-stage, batch, total, dual





Dimension

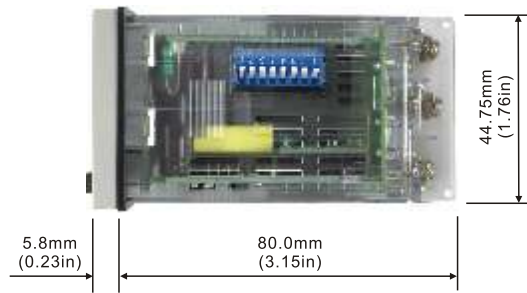

Specification

Power input	AC100~240V, 50/60Hz
Input voltage range	85% to 110%, rated voltage
Power consumption	Less than 10VA
External power supply	12dc \pm 10%, 100 mA
Display	Double-line, 6-digit negative transmissive LCD display
Input signal	Non-voltage input (NPN): ON impedance 1K ohm max. ON residual voltage: 2V max.
	Voltage input (PNP): High level: 4.5 to 30Vdc, Low level: 0 to 2Vdc
Output 1	Relay: SPST max.250Vac, 5A (resistance load)
	Transistor: NPN open collector. When 100mA/30Vdc, residual voltage = 1.5Vdc max.
Output 2	Relay: SPDT max.250Vac, 5A (resistance load)
	Transistor: NPN open collector. When 100mA/30Vdc, residual voltage = 1.5Vdc max.
Dielectric strength	2000Vac 50/60 Hz for 1 minute
Vibration resistance	Without damage: 10 ~ 55Hz, amplitude = 0.75mm, 3 axes for 2 hours
Shock resistance	Without damage: drop 4 times, 300m/s ² , 3 edges, 6 surfaces and 1 corner
Ambient temperature	0 °C to +50 °C
Storage temperature	-20 °C to +65 °C
Altitude	2000m or less
Ambient humidity	35% to 85% RH (non-condensing)
Pollution degree	2

Ordering Information

GTA **4** **0** **0** **0** **A**

1 **2** **3** **4** **5**

1 Panel size	4 : 48mmX48mm
2 Output 2	0 : Transistor ; 1 : Relay
3 Preset stage	0 : 2 stages
4 Communication	0 : None
5 Power supply	A : AC100~240V



ASIA

Delta Electronics, Inc.
Taoyuan1

31-1, Xingbang Road, Guishan Industrial Zone,
Taoyuan County 33370, Taiwan, R.O.C.
TEL: 886-3-362-6301 / FAX: 886-3-362-7267

Delta Electronics (Jiang Su) Ltd.
Wujiang Plant3

1688 Jiangxing East Road,
Wujiang Economy Development Zone,
Wujiang City, Jiang Su Province,
People's Republic of China (Post code: 215200)
TEL: 86-512-6340-3008 / FAX: 86-769-6340-7290

Delta Electronics (Japan), Inc.
Tokyo Office

Delta Shibadaimon Building, 2-1-14 Shibadaimon,
Minato-Ku, Tokyo, 105-0012, Japan
TEL: 81-3-5733-1111 / FAX: 81-3-5733-1211

Delta Electronics (Korea), Inc.

Donghwa B/D 3F, 235-6, Nonhyun-dong,
Kangnam-gu, Seoul 135-010, Korea
TEL: 82-2-515-5303/5 / FAX: 82-2-515-5302

Delta Electronics (Singapore) Pte. Ltd.

8 Kaki Bukit Road 2, #04-18 Ruby Warehouse Complex,
Singapore 417841
TEL: 65-747-5155 / FAX: 65-744-9228

AMERICA

Delta Products Corporation (USA)
Raleigh Office

P.O. Box 12173, 5101 Davis Drive,
Research Triangle Park, NC 27709, U.S.A.
TEL: 1-919-767-3813 / FAX: 1-919-767-3969

EUROPE

Deltronics (The Netherlands) B.V.
Eindhoven Office

De Witbogt 15, 5652 AG Eindhoven, The Netherlands
TEL: 31-40-2592850 / FAX: 31-40-2592851